



**Product
overview**

Lattice™ is a range of hanging sculptures built from a grid of acoustic fins. Covering a greater surface area than traditional parallel fin systems, Lattice effectively absorbs echo and reverberation in interior spaces. Lattice is made from 100% polyester fiber and is lightweight and structurally sound—holding form over its lifetime.

Specification

Suspended acoustic absorption system shall be Lattice made from thermally bonded polyester containing not less than 60% recycled material as manufactured by Autex. www.autexglobal.com

Lattice to be supplied unassembled with 4 x 39" galvanised cables, 4 x ceiling mounts, 4 x "Velda" cable clips, 4 x alloy tube inserts. Install as per Lattice (Eclipse, Torus, Trapezium) Install Instructions.

Suspended acoustic absorber Lattice Eclipse/Torus/Trapezium, color (), sound absorption Class A, NRC 1.00 – if direct fixed to ceiling: Class A, NRC 1.00. Fire rating ASTM E-84-14: Class A, FS:0 - SD:45, ISO 9705: Classification: Group 1-S, AS ISO 9705 – 2003, Classification: Group 1, BS EN 13501-1:2018: B - s2, d0.


Suspended acoustic absorber 57.1" x 57.1" x 11.54" (nom. depth), color (). Fire rating ASTM E-84-15a: Class A, FS:0 - SD:45, ISO 9705: Classification: Group 1-S, AS ISO 9705 – 2003. Classification: Group , BS EN 13501-1:2018: B - s2, d0.

Lattice to be supplied unassembled with 8 x 39" galvanised cables, 8 x ceiling mounts, 8 x "Velda" cable clips. Install as per Lattice Install Instructions.

Color options

 Falling Water

 Rosada

 Beehive

 Galaxy

 Opera

 Parthenon

 Pinnacle

 Senado

 Sargazo

 Petronas

 Acros

 Empire

 Bosco

 Flatiron


 Lotus

 Savoye

 Tree House

 Pavilion

 Gherkin

 Ironbank

 Muralla

 Zenith

 Cavalier



Product specifications

Product name	Lattice™ Eclipse
Composition	100% polyester fiber (PET)
Assembled size	47.1" x 92.4" x 13.3"
Tolerance	(+/- 0.02") x (+/- 0.02") x (+/- 0.02")
Thickness	1/2"
Tolerance	(+/-6%)
Weight	7.54 oz/ft ²

Installation

Install as per Autex Acoustics recommendations. Install instructions are included in each pack or available on the website.

Acoustic performance

Lattice Eclipse is specifically designed to reduce and control reverberated noise and echo in building interiors.

Frequency (Hz)	125	250	500	1000	2000	4000	Metric sabin per unit
● Lattice Eclipse (1/2" direct fix)	0.60	1.60	1.70	2.20	2.80	3.20	2.10
● Lattice Eclipse (1/2" suspended 7.87")	0.30	1.0	1.80	2.30	3.10	3.60	2.05


All results are reported in metric sabin - per unit. Equivalent sound absorption area according to ISO 354 measurement of sound absorption in a reverberation room. Average absorption (sabins per unit) calculated at one-third octave bands centered on 250 Hz, 500 Hz, 1000 Hz and 2000 Hz and rounded to the nearest 0.05.

Sound Absorption Coefficients According to ISO 354.

University of Auckland Testing Service

Lattice Eclipse 1/2" direct fix - test no: T1420-1

Lattice Eclipse 1/2" suspended 7.87" - test no: T1409-7

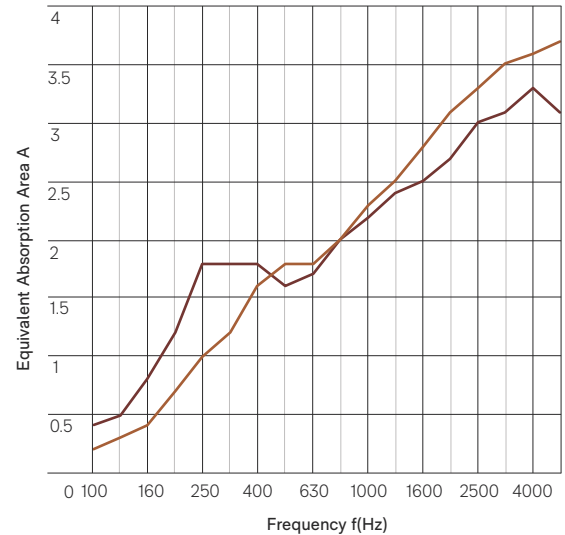

Product specifications

Product name	Lattice™ Torus
Composition	100% polyester fiber (PET)
Assembled size	57.1" x 57.1" x 11.5"
Tolerance	(+/- 0.02") x (+/- 0.02") x (+/- 0.02")
Thickness	1/2"
Tolerance	(+/-6%)
Weight	7.54 oz/ft ²

Installation

Install as per Autex Acoustics recommendations. Install instructions are included in each pack or available on the website.



Acoustic performance

Lattice Torus is specifically designed to reduce and control reverberated noise and echo in building interiors.


Frequency (Hz)	125	250	500	1000	2000	4000	Metric sabin per unit
● Lattice Torus (1/2" direct fix)	0.80	1.70	1.60	1.90	2.80	2.30	1.85
● Lattice Torus (1/2" suspended 7.87")	0.30	0.80	1.30	1.80	3.10	2.40	1.60

All results are reported in metric sabin - per unit. Equivalent sound absorption area according to ISO 354 measurement of sound absorption in a reverberation room. Average absorption (sabins per unit) calculated at one-third octave bands centered on 250 Hz, 500 Hz, 1000 Hz and 2000 Hz and rounded to the nearest 0.05.

Sound Absorption Coefficients According to ISO 354. University of Auckland Testing Service

Lattice Torus 1/2" direct fix - test no: T1420-2

Lattice Torus 1/2" suspended 7.87" - test no: T1420-3

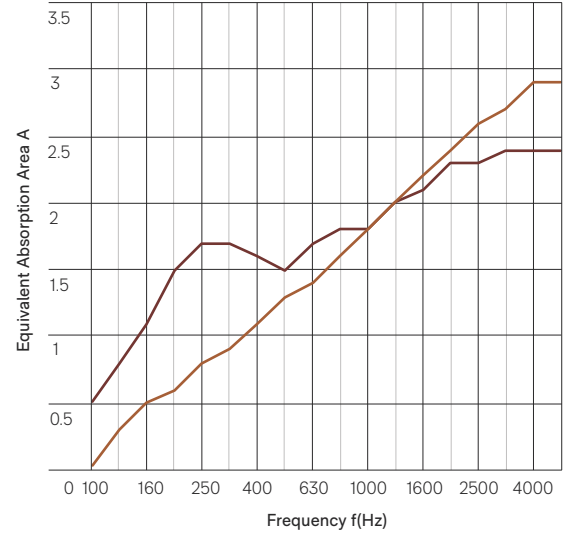

Product specifications

Product name	Lattice™ Trapezium
Composition	100% polyester fiber (PET)
Assembled size	47.1" x 92.4" x 13.3"
Tolerance	(+/- 0.02") x (+/- 0.02") x (+/- 0.02")
Thickness	1/2"
Tolerance	(+/-6%)
Weight	7.54 oz/ft ²

Installation

Install as per Autex Acoustics recommendations. Install instructions are included in each pack or available on the website.

Acoustic performance

Lattice Trapezium is specifically designed to reduce and control reverberated noise and echo in building interiors.


Frequency (Hz)	125	250	500	1000	2000	4000	Metric sabin per unit
● Lattice Trapezium (1/2" direct fix)	2.20	4.0	3.40	4.0	4.40	4.60	3.90
● Lattice Trapezium (1/2" suspended 7.87")	1.50	2.50	3.20	4.10	5.0	5.40	3.70

All results are reported in metric sabin - per unit. Equivalent sound absorption area according to ISO 354 measurement of sound absorption in a reverberation room. Average absorption (sabins per unit) calculated at one-third octave bands centered on 250 Hz, 500 Hz, 1000 Hz and 2000 Hz and rounded to the nearest 0.05.

Sound Absorption Coefficients According to ISO 354. University of Auckland Testing Service

Lattice Trapezium 1/2" direct fix - test no: T1326-16

Lattice Trapezium 1/2" suspended 7.87" - test no: T1326-14

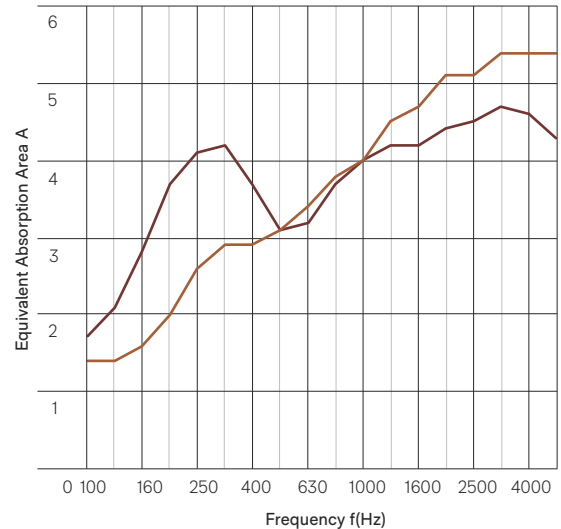



Product specifications

Fire ratings

Lattice is made from Cube™ as the base material. Cube (12 mm) has been evaluated using the following test methods:

ISO 9705: 1993

Classification: Group 1-S
Smoke production rate: <5.0m²/s
As required by NZBC C/VM2

AS ISO 9705 - 2003

Classification: Group 1
(SMOGRArc): <100m²/s²
Assessed using methodology AS ISO 9705 - 2003 in accordance with AS 56371:2015, as required by BCA Specification C110-4 FI 4974 FAR 4055

BS EN 13501-1:2018

Ceiling applications
Classification: B-s2,d0
(Cube™ 1/2")
Tested using BS EN ISO 11925-2:2020 and BS EN 13823:2020 and classified in accordance with BS EN 13501-1:2018, as required by BS EN 13964:2014. EUI-20-000268-B

ASTM E-84-15a

Class A, FS:0 - SD:45
RJ4479-2

VOC emissions

Autex Acoustics polyester has been tested for chemical emissions in accordance with ASTM D5116 and is considered a low VOC product.
VOC concentration:
0.009 mg/m³ (7 days)

Water vapor sorption

ASTM C1104 / C1104M-13a
Test conditions: 49°C, 95%RH
Water vapor absorbed and adsorped after 4 days:
0.4% by weight

Microbial resistance

ASTM G21-15
Growth rating: 0 (No growth)
Lattice does not promote the growth of molds and mildew.

Color fastness to light

Lattice is suitable for indoor use only. Light fastness is dependent on use and exposure. Lattice has been evaluated to the following standard:
ISO 105-B02:2014
Rating: 6 (Highest = 7)

Color fastness to rubbing

ISO 105-X12:2016
Dry rating: 4-5 (Highest = 5)
Wet rating: 4-5 (Highest = 5)

Pattern repeat

Non-woven. No pattern repeat but product has directional grain. Product may vary from samples and batch to batch due to fiber blending and lay-up, which is an inherent feature of this product.

Fabric care

Blot spills from fabric quickly. Wipe with a damp cloth. Avoid rubbing and excessive amounts of water as this will affect the finish. Use carpet or upholstery shampoo as directed. Blot with a clean dry cloth after each application of solution.

Custom printed Lattice requires the services of a specialist cleaning company. Refer to the Lattice Care and Maintenance Guide for more information.

Environmental

Autex Acoustics is committed to best practice through our ISO 14001 certified Environmental Management Systems.

Lattice contains a minimum of 60% previously recycled polyester fiber (from PET bottle-flake). Off-cuts and manufacturing waste are re-used or recycled wherever possible.

Lattice is manufactured from 100% polyester fiber and does not contain formaldehyde binders. Autex Acoustics polyester fiber supports safer indoor air quality and will not become a potential airborne pollutant.

Service

For further information about Lattice, Cube or any other Autex Acoustics product, please contact your account manager or visit our website.

Light reflectance values by color

Lattice is suitable for indoor use only. LRVs were measured in accordance with BS 8493:2008+A1:2010

Pavilion	80	Galaxy	15
Opera	49	Lotus	14
Savoye	46	Ironbank	13
Senado	45	Cavalier	12
Rosada	44	Muralla	9
Acros	40	Gherkin	8
Falling Water	34	Empire	5
Parthenon	33	Sargazo	4
Beehive	33	Pinnacle	3
Bosco	29	Tree House	3
Flatiron	24	Petronas	2
Zenith	23		



Caring for the environment

Lattice is manufactured using 100% polyester fiber and contains a minimum of 60% recycled fiber (from PET plastics). Our products are designed to be recycled at the end of their life too.

We have continual improvement programmes in which we implement a range of initiatives to mitigate the environmental 'hotspots' that we have identified. Our products are GreenRate Level A, LCARate Gold and PHD level platinum certified.

Lattice is made from Cube™ which is DeclareSM certified to be Red List free and can be used in Living Building Challenge projects. Autex has a high functioning Environmental Management System (ISO 14001) to enhance our environmental performance and contribute to sustainable development.



- **Autex Industries Ltd**
702-718 Rosebank Rd
Private Bag 19988
Avondale 1746, Auckland
New Zealand
Freephone 0800 428 839
Phone +64 9 828 9179
Fax +64 9 828 5810

- **Autex Australia Pty Ltd**
166 Bamfield Road
PO Box 5099
West Heidelberg, Melbourne
VIC 3081, Australia
Freephone 1800 678 160
Phone +61 3 9457 6700
Fax +61 3 9457 1020

- **Autex Acoustics Ltd**
Unit J4, Lowfields Way,
Lowfields Business Park,
Elland, West Yorkshire
Hx5 9Da
United Kingdom
Phone +44 0 1422418899

- **Autex Acoustics LLC**
1630 Dan Kipper Dr,
Riverside, CA 92507
United States of America
Phone +1 424 203 1813

An ISO 9001, ISO 14001 and ISO 45001 certified company. The brand names and logos mentioned herein are registered or unregistered trademarks either owned or used under license by Autex Industries Limited or other members of the Autex Group. The contents of this document are protected by Copyright 2021 Autex Industries Ltd. All Rights Reserved. It is the user's responsibility to determine if the product and information presented in this document is suitable for the intended application by engaging a suitably qualified consultant. The information contained in this document is correct to the best of our knowledge at the date of its publication. To verify that this document is the most current publication please check our website or contact your Autex account manager.