



**Product  
overview**

Vicinity™ Desk Screens are elegant, lightweight, 100% polyester acoustic screens designed to be fixed non-destructively to any desk via the Vicinity Desk Clamps. A modular desk screen system, Vicinity Desk Screens and Clamps work in collaboration; the die-cast zinc clamps slot comfortably into the screen via pre-cut sockets which are then fixed to the desk using a single Allen key. With neat, clean edges and rich, solid color, Vicinity Desk Screens require no edging or capping.

**Color options**

 Falling Water	 Zenith	 Gherkin
 Galaxy	 Rosada	 Muralla
 Pinnacle	 Opera	 Cavalier
 Petronas	 Senado	 Beehive
 Empire	 Acros	 Parthenon
 Flatiron	 Bosco	 Sargazo
 Savoye	 Lotus	
 Ironbank	 Tree House	

**Product specifications**

<b>Product name</b>	Vicinity™ Desk Screens
<b>Composition</b>	100% polyester fiber; die-cast zinc clamp
<b>Thickness</b>	1/2"
<b>Tolerance</b>	(+/- 6%)

**Installation**  
Install as per Autex Acoustics recommendations. Install instructions are included in each pack and available on the website.




## Acoustic performance

Vicinity is specifically designed to reduce and control reverberated noise and echo noise in building interiors.

	Frequency (Hz)	125	250	500	1000	2000	4000	Metric sabin per unit
●	<b>Hedge</b> (1600 mm)	0.3	0.65	0.9	1.1	1.35	1.5	1
●	<b>Hedge</b> (1800 mm)	0.35	0.75	1	1.2	1.55	1.75	1.1
●	<b>Slate</b> (800 mm)	0.15	0.3	0.4	0.5	0.65	0.75	0.5
●	<b>Sol</b> (600 mm)	0.1	0.2	0.25	0.35	0.4	0.45	0.3
●	<b>Crest</b> (1600 mm)	0.2	0.45	0.6	0.75	0.95	1.05	0.7
●	<b>Nook</b> (1600 mm + 1800 mm)	0.5	1	1.4	1.65	2.1	2.35	1.55
●	<b>Haven</b> (1600 mm + 1800 mm)	0.5	1	1.4	1.65	2.1	2.35	1.55
●	<b>Den</b> (1600 mm + 1800 mm)	0.25	0.5	0.7	0.85	1.05	1.2	0.75
●	<b>Polka</b> (772 mm + 380 mm)	0.2	0.45	0.65	0.75	1	1.1	0.7

### Equivalent Absorption Area according to ISO 354

Hedge	(1600 mm)
Hedge	(1800 mm)
Slate	(800 mm)
Sol	(600 mm)
Crest	(1600 mm)
Nook	(1600 mm + 1800 mm)
Haven	(1600 mm + 1800 mm)
Den	(1600 mm + 1800 mm)
Polka	(772 mm + 380 mm)

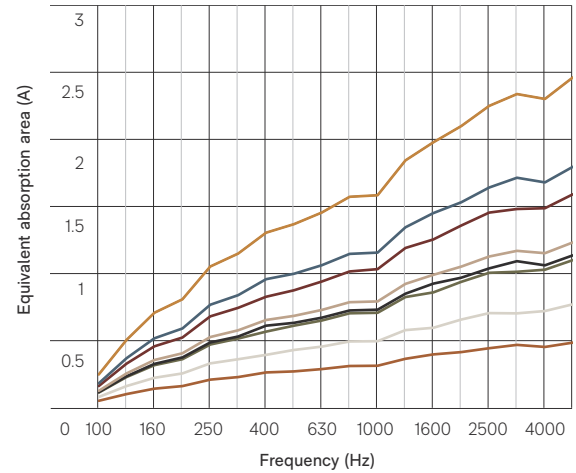

All results are reported in metric sabin - per unit. Equivalent sound absorption area according to ISO 354 measurement of sound absorption in a reverberation room. Average absorption (sabins per unit) calculated at one-third octave bands centered on 250 Hz, 500 Hz, 1000 Hz, and 2000 Hz and rounded to the nearest 0.05.

## Product specifications

### Fire ratings

Vicinity is made from Cube™ as the base material. Cube has been evaluated using the following test methods:

### ISO 9705: 1993

Classification: Group 1-S  
Smoke production rate: <5.0m<sup>2</sup>/s  
As required by NZBC C/V/M2

### AS ISO 9705 - 2003

Classification: Group 1  
(SMOGR<sub>Arc</sub>): <100m<sup>2</sup>/s<sup>2</sup>  
Assessed using methodology AS ISO 9705 - 2003 in accordance with AS 56371:2015, as required by BCA Specification C110-4 FI 4974 FAR 4055

### BS EN 13501-1:2018

Wall applications  
Classification: B-s2,d0  
(Cube™ 12 mm)  
Tested using BS EN ISO 11925-2:2020 and BS EN 13823:2020 and classified in accordance with BS EN 13501-1:2018, as required by BS EN 15102:2007 + A1:2011. EUI-20-000268-A

### BS EN 1021-1

Result: Pass (Cigarette)  
13622147

### ASTM E-84-15a

Class A, FS:0 - SD:45  
(Cube 1/2")  
RJ4479-2

### VOC emissions

Autex Acoustics polyester has been tested for chemical emissions in accordance with ASTM D5116 and is considered a low VOC product. VOC concentration: 0.009 mg/m<sup>3</sup> (7 days)

### Water vapor sorption

ASTM C1104 / C1104M-13a  
Test conditions: 49°C, 95%RH  
Water vapor absorbed and adsorbed after 4 days: 0.4% by weight

### Microbial resistance

ASTM G21-15  
Growth rating: 0 (No growth)  
Vicinity does not promote the growth of molds and mildew.

### Color fastness to light

Vicinity is suitable for indoor use only. Light fastness is dependent on use and exposure. Vicinity has been evaluated to the following standard: ISO 105-B02:2014  
Rating: 6 (Highest = 7)

### Color fastness to rubbing

SO 105-X12:2016  
Dry rating: 4-5 (Highest = 5)  
Wet rating: 4-5 (Highest = 5)

### Fabric care

Blot spills from fabric quickly. Wipe with a damp cloth. Avoid rubbing and using excessive amounts of water as this will affect the finish. Use carpet or upholstery shampoo as directed. Blot with a clean, dry cloth after each application of the solution. Custom printed Vicinity requires the services of a specialist cleaning company. Refer to the Vicinity Care and Maintenance Guide for more information.

### Environmental

Autex Acoustics is committed to best practice through our ISO 14001 certified Environmental Management Systems.

Vicinity contains a minimum of 60% previously recycled polyester fiber (from PET bottle-flake). Off-cuts and manufacturing waste are re-used or recycled wherever possible. Uncontaminated Cube can be recycled.

Vicinity is manufactured from 100% polyester fiber and does not contain formaldehyde binders. Autex Acoustics polyester fiber supports safer indoor air quality and will not become a potential airborne pollutant.

### Service

For further information about Vicinity or any other Autex Acoustics product, please contact your account manager or visit our website.

The information contained in this document is correct to the best of our knowledge at the date of its publication. It is the user's responsibility to determine if this information is suitable for their intended application and to make sure that this document is the most current publication. You can do this by checking our website or contacting your account manager.



## Light reflectance values by color

Vicinity Desk Screens are suitable for indoor use only. LRVs were measured in accordance with BS 8493:2008+A1:2010

Opera	49	Galaxy	15
Savoye	46	Lotus	14
Rosada	45	Ironbank	13
Senado	44	Cavalier	12
Acros	40	Muralla	9
Falling Water	34	Gherkin	8
Parthenon	33	Empire	5
Beehive	33	Sargazo	4
Bosco	29	Pinnacle	3
Flatiron	24	Tree House	3
Zenith	23	Petronas	2

## Caring for the environment

Vicinity is manufactured using 100% polyester fiber and contains a minimum of 60% recycled fiber (from PET plastics). Our products are designed to be recycled at the end of their life too.

We have continual improvement programmes in which we implement a range of initiatives to mitigate the environmental 'hotspots' that we have identified. Our products are GreenRate Level A, Health Product Declaration (HPD), and CDHP Standard certified.

Vicinity is made from Cube which is DeclareSM certified to be Red List free and can be used in Living Building Challenge projects. Autex has a high functioning Environmental Management System (ISO 14001) to enhance our environmental performance and contribute to sustainable development.



- **Autex Industries Ltd**  
702-718 Rosebank Rd  
Private Bag 19988  
Avondale 1746, Auckland  
New Zealand  
Freephone 0800 428 839  
Phone +64 9 828 9179  
Fax +64 9 828 5810

- **Autex Australia Pty Ltd**  
166 Bamfield Road  
PO Box 5099  
West Heidelberg, Melbourne  
VIC 3081, Australia  
Freephone 1800 678 160  
Phone +61 3 9457 6700  
Fax +61 3 9457 1020

- **Autex Acoustics Ltd**  
Unit J4, Lowfields Way,  
Lowfields Business Park,  
Elland, West Yorkshire  
Hx5 9Da  
United Kingdom  
Phone +44 0 1422418899

- **Autex Acoustics LLC**  
1630 Dan Kipper Dr,  
Riverside, CA 92507  
United States of America  
Phone +1 424 203 1813

An ISO 9001, ISO 14001 and ISO 45001 certified company. The brand names and logos mentioned herein are registered or unregistered trademarks either owned or used under license by Autex Industries Limited or other members of the Autex Group. The contents of this document are protected by Copyright 2021 Autex Industries Ltd. All Rights Reserved. It is the user's responsibility to determine if the product and information presented in this document is suitable for the intended application by engaging a suitably qualified consultant. The information contained in this document is correct to the best of our knowledge at the date of its publication. To verify that this document is the most current publication please check our website or contact your Autex account manager.