

INTERIOR ACOUSTICS 3D TILES



3D TILES
DESIGN: S-5.37 AND S-5.34
COLOR: NOIR, STONEWASH
AND CIVIC



3D TILES

3D Tiles are our stylish and high performing version of wall art. In packs of 6 that include all the fixings you need to install, our lightweight and semi-rigid 3D Tiles are super easy to put up all while giving you the freedom to mix and match both colors and styles. With 15 colors in eight different designs, you can create a feature that reflects your own style and environment.

But they don't only look good, they are high performing as well; specifically designed to reduce and control echo creating a more focused and productive space.

Just like the rest of the interior acoustics range, durability, longevity and performance are assured.

3D TILES

APPLICATIONS

- Decorative and functional acoustic tiles for residential, office, education, retail, hospitality and commercial interiors
- Minimise noise in the interior environment and create unique finishes and features
- Easy dry clip system for installation

SPECIFICATION



(Wall) treatment shall be 3D Tile series acoustic tile from thermally molded, needle punched, felted polyester material containing not less than 55% recycled material as manufactured by Autex Industries Ltd. www.autexindustries.com

Tile (S-5.__), color (___), sound absorption class C, NRC 0.65-0.75 depending on design. Fire rating ASTM E-84: Class A FS:0 - SD:10.


Tiles to be supplied with 1 standard tile clip per tile. Install as per 3D Tile Install Instructions.



S-5.26 DESIGN

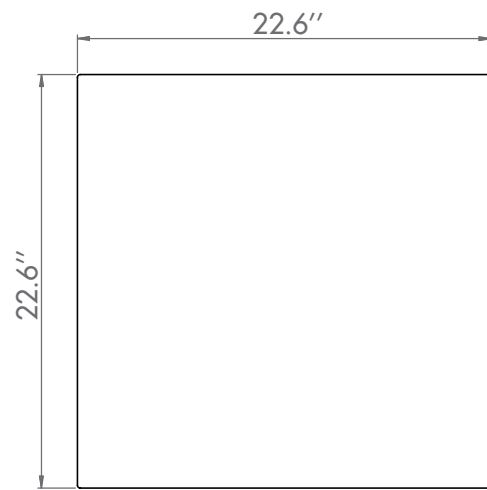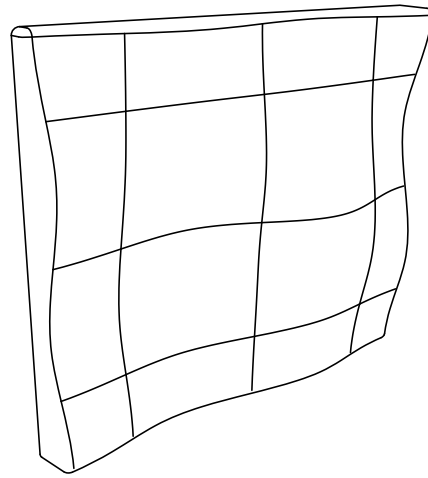

ABSORPTION COEFFICIENT ACCORDING TO ISO 354

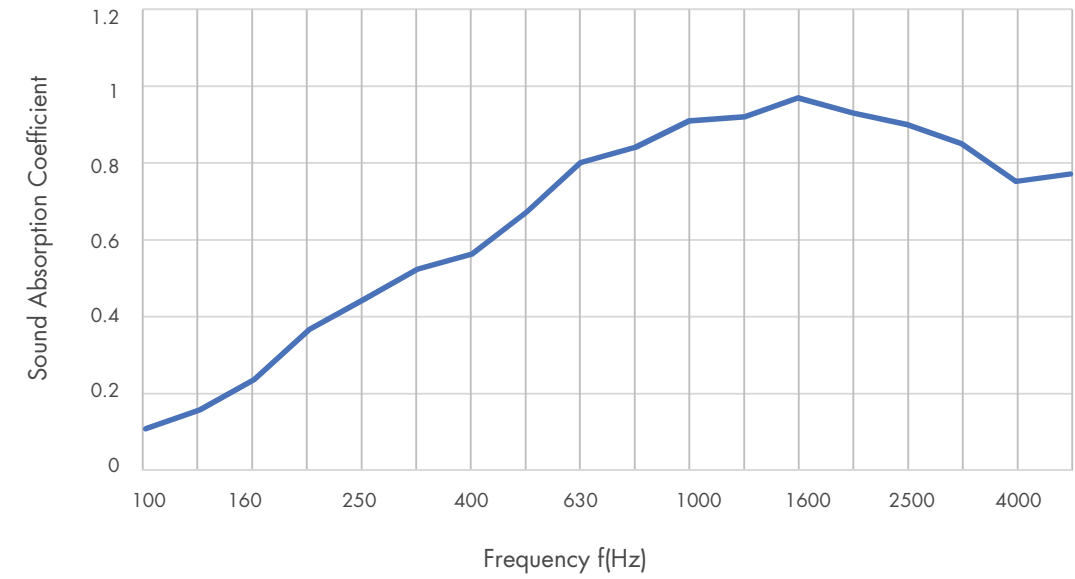

The graph above presents third octave sound absorption coefficients in accordance with ISO 354 measurement of sound absorption in a reverberation room. The table below presents the practical sound absorption coefficients in accordance with ISO 11654. The NRC rating is determined as the arithmetic average of the absorption coefficients measured by one-third octave bands centered on 250 Hz, 500 Hz, 1000 Hz and 2000 Hz and rounded to the nearest 0.05.

Frequency (Hz)	University of Auckland Test Report Number	125	250	500	1000	2000	4000	NRC
3D Tiles	T1012-3	0.15	0.45	0.65	0.90	0.90	0.80	0.75

PRODUCT SPECIFICATIONS

Product Name 3D Tiles S-5.26
 Composition 100% Polyester Fiber (PET)
 Tile Dimensions 22.6" x 22.6"
 Tile Tolerance (+0.02") (+0.02")
 Depth 3.15"
 Depth Tolerance (+0.0.2")
 Weight 5.51 oz/ft²

INSTALLATION

Install as per Autex recommendations. Install instructions are included in each pack or available on the website.

ACOUSTIC PERFORMANCE



3D Tiles S-5.26 are specifically designed to reduce and control reverberated noise (echo) in building interiors.

LIGHT REFLECTANCE VALUES BY COLOR


Civic	57	Avocado	11
Silver	23	Blush	10
Porcelain	22	Blazing Red	8
Fawn	20	Bark	5
Granny Smith	20	Stately	3
Stonewash	19	Charcoal	3
Brilliant Orange	15	Noir	1
Electric Blue	12		

MEASURED IN ACCORDANCE WITH BS 8493:2008+A1:2010

S-5.28 DESIGN

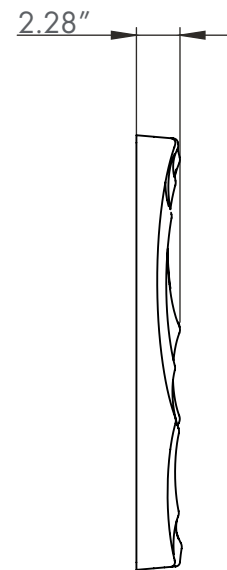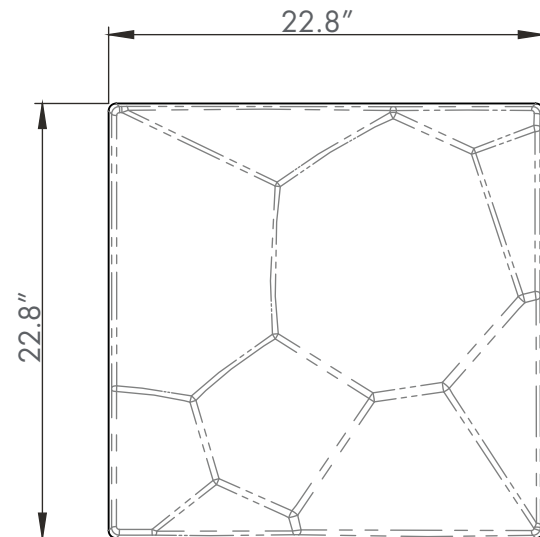

ABSORPTION COEFFICIENT ACCORDING TO ISO 354

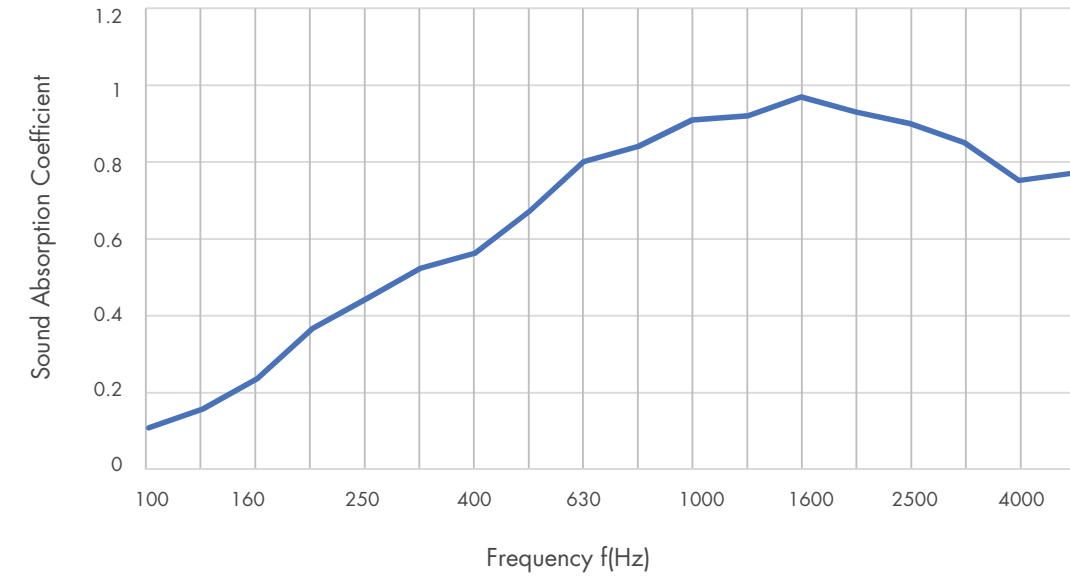

The graph above presents third octave sound absorption coefficients in accordance with ISO 354 measurement of sound absorption in a reverberation room. The table below presents the practical sound absorption coefficients in accordance with ISO 11654. The NRC rating is determined as the arithmetic average of the absorption coefficients measured by one-third octave bands centered on 250 Hz, 500 Hz, 1000 Hz and 2000 Hz and rounded to the nearest 0.05.

Frequency (Hz)	University of Auckland Test Report Number	125	250	500	1000	2000	4000	NRC
3D Tiles	T1012-3	0.15	0.45	0.65	0.90	0.90	0.80	0.75

PRODUCT SPECIFICATIONS

Product Name	3D Tiles S-5.28
Composition	100% Polyester Fiber (PET)
Tile Dimensions	22.8" x 22.8"
Tile Tolerance	(+0.02") (+0.02")
Depth	2.28"
Depth Tolerance	(+0.0.2")
Weight	5.51 oz/ft ²

INSTALLATION

Install as per Autex recommendations. Install instructions are included in each pack or available on the website.

ACOUSTIC PERFORMANCE


3D Tiles S-5.28 are specifically designed to reduce and control reverberated noise (echo) in building interiors.

LIGHT REFLECTANCE VALUES BY COLOR


Civic	57	Avocado	11
Silver	23	Blush	10
Porcelain	22	Blazing Red	8
Fawn	20	Bark	5
Granny Smith	20	Stately	3
Stonewash	19	Charcoal	3
Brilliant Orange	15	Noir	1
Electric Blue	12		

MEASURED IN ACCORDANCE WITH BS 8493:2008+A1:2010


S-5.32 DESIGN

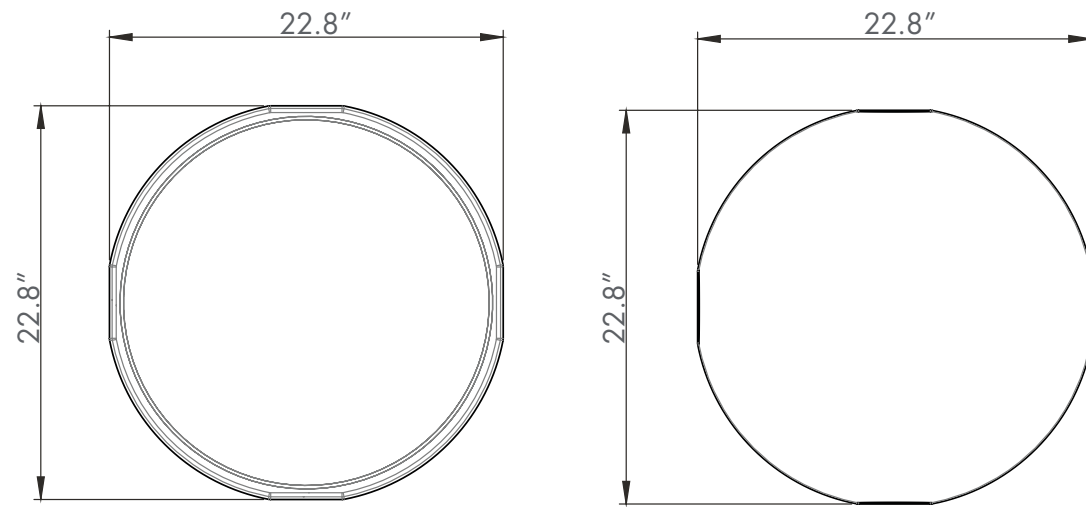


CONCAVE

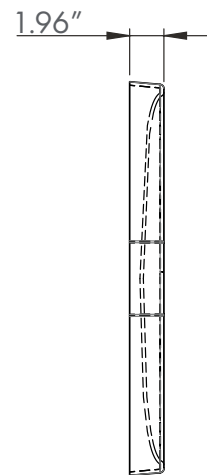

CONVEX

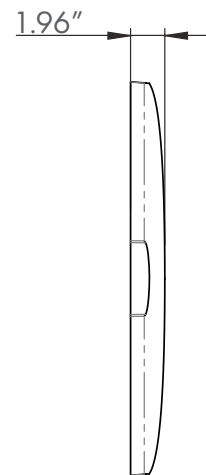

ABSORPTION COEFFICIENT ACCORDING TO ISO 354

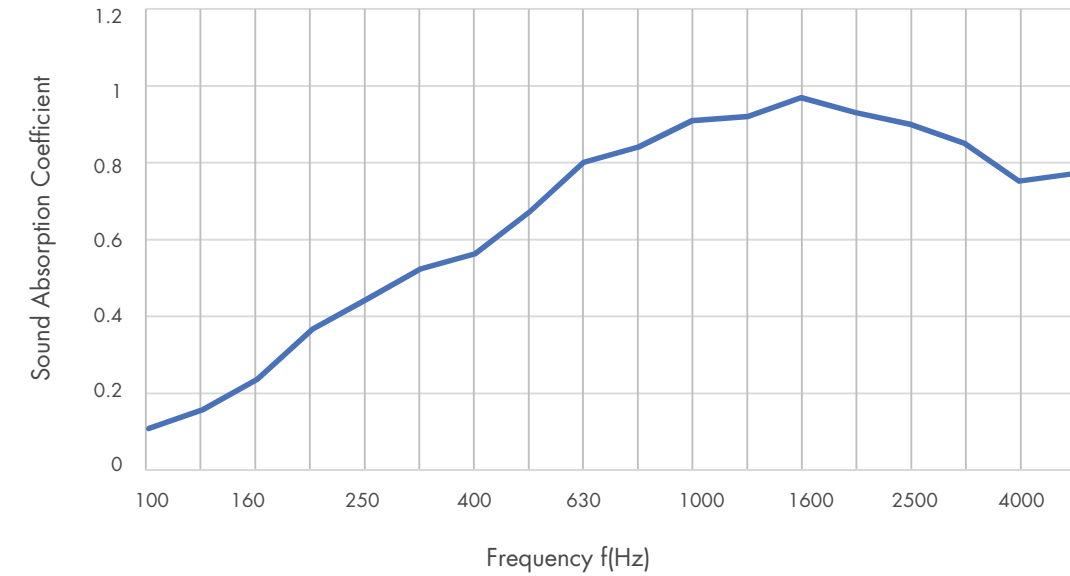

The graph above presents third octave sound absorption coefficients in accordance with ISO 354 measurement of sound absorption in a reverberation room. The table below presents the practical sound absorption coefficients in accordance with ISO 11654. The NRC rating is determined as the arithmetic average of the absorption coefficients measured by one-third octave bands centered on 250 Hz, 500 Hz, 1000 Hz and 2000 Hz and rounded to the nearest 0.05.

Frequency (Hz)	University of Auckland Test Report Number	125	250	500	1000	2000	4000	NRC
3D Tiles	T1012-3	0.15	0.45	0.65	0.90	0.90	0.80	0.75

PRODUCT SPECIFICATIONS

Product Name	3D Tiles S-5.32
Composition	100% Polyester Fiber (PET)
Tile Dimensions	22.8" x 22.8"
Tile Tolerance	(+0.02") (+0.02")
Depth	1.96"
Depth Tolerance	(+0.0.2")
Weight	5.51 oz/ft ²

INSTALLATION

Install as per Autex recommendations. Install instructions are included in each pack or available on the website.

ACOUSTIC PERFORMANCE




3D Tiles S-5.32 are specifically designed to reduce and control reverberated noise (echo) in building interiors.

LIGHT REFLECTANCE VALUES BY COLOR


Civic	57	Avocado	11
Silver	23	Blush	10
Porcelain	22	Blazing Red	8
Fawn	20	Bark	5
Granny Smith	20	Stately	3
Stonewash	19	Charcoal	3
Brilliant Orange	15	Noir	1
Electric Blue	12		

MEASURED IN ACCORDANCE WITH BS 8493:2008+A1:2010

S-5.34 DESIGN

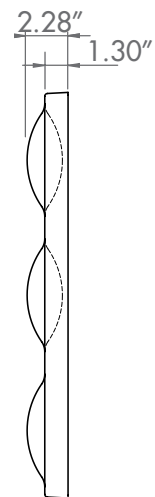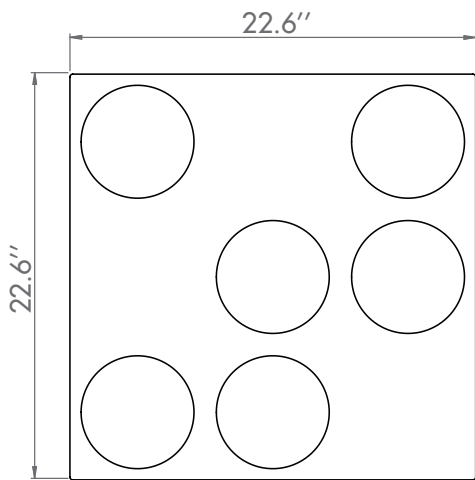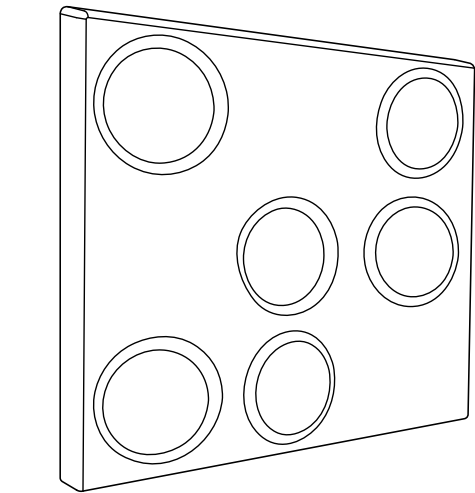

ABSORPTION COEFFICIENT ACCORDING TO ISO 354

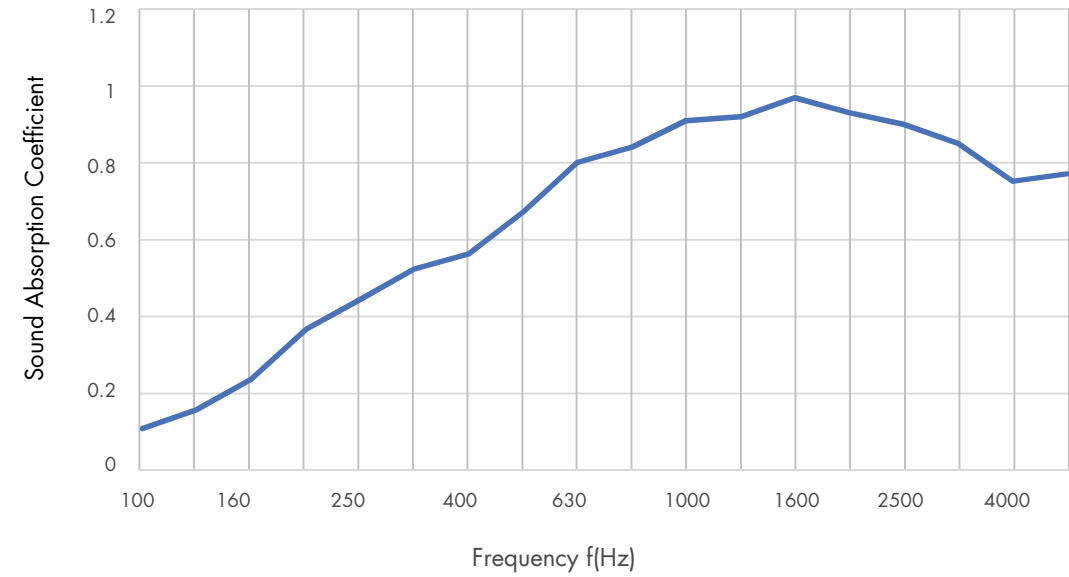

The graph above presents third octave sound absorption coefficients in accordance with ISO 354 measurement of sound absorption in a reverberation room. The table below presents the practical sound absorption coefficients in accordance with ISO 11654. The NRC rating is determined as the arithmetic average of the absorption coefficients measured by one-third octave bands centered on 250 Hz, 500 Hz, 1000 Hz and 2000 Hz and rounded to the nearest 0.05.

Frequency (Hz)	University of Auckland Test Report Number	125	250	500	1000	2000	4000	NRC
3D Tiles	T1012-3	0.15	0.45	0.65	0.90	0.90	0.80	0.75

PRODUCT SPECIFICATIONS

Product Name 3D Tiles S-5.34
 Composition 100% Polyester Fiber (PET)
 Tile Dimensions 22.6" x 22.6"
 Tile Tolerance (+0.02") (+0.02")
 Depth 2.28"
 Depth Tolerance (+0.0.2")
 Weight 5.51 oz/ft²

INSTALLATION

Install as per Autex recommendations. Install instructions are included in each pack or available on the website.

ACOUSTIC PERFORMANCE


3D Tiles S-5.34 are specifically designed to reduce and control reverberated noise (echo) in building interiors.

LIGHT REFLECTANCE VALUES BY COLOR


Civic	57	Avocado	11
Silver	23	Blush	10
Porcelain	22	Blazing Red	8
Fawn	20	Bark	5
Granny Smith	20	Stately	3
Stonewash	19	Charcoal	3
Brilliant Orange	15	Noir	1
Electric Blue	12		

MEASURED IN ACCORDANCE WITH BS 8493:2008+A1:2010

S-5.37 DESIGN

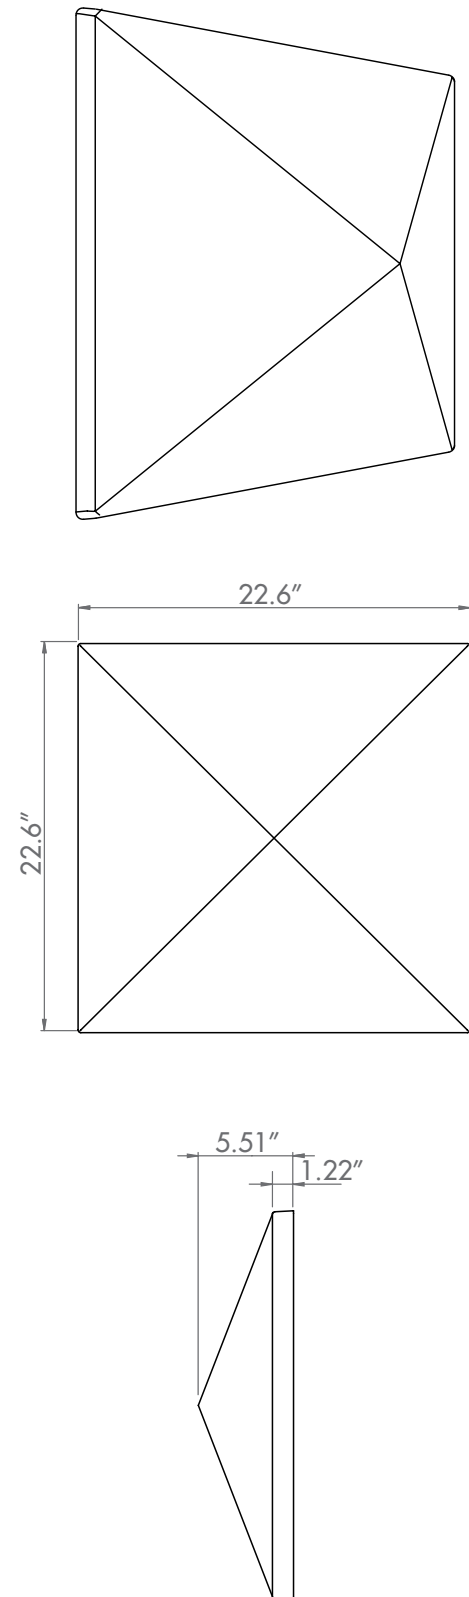

ABSORPTION COEFFICIENT ACCORDING TO ISO 354

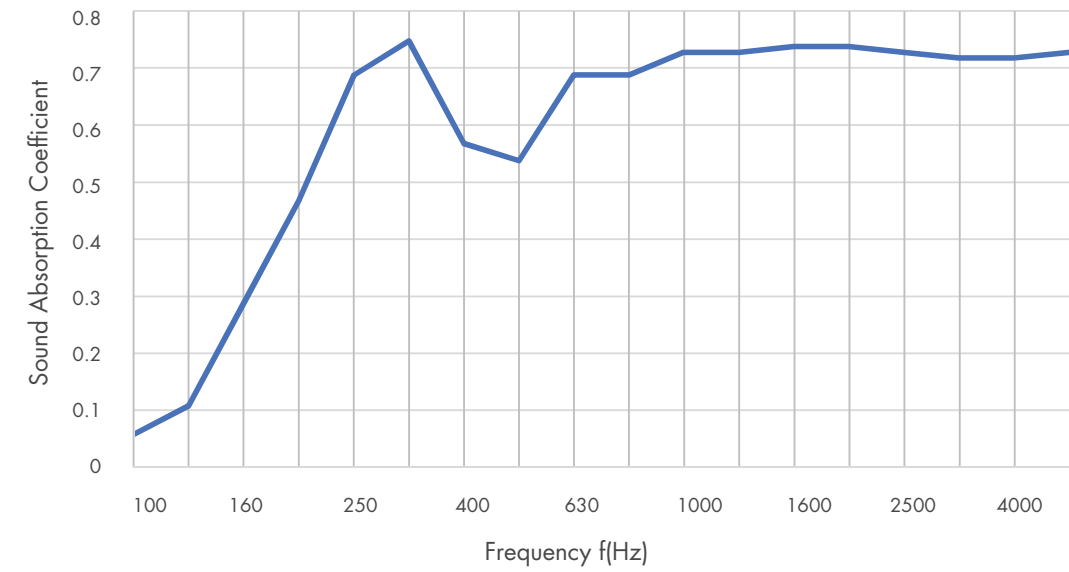

The graph above presents third octave sound absorption coefficients in accordance with ISO 354 measurement of sound absorption in a reverberation room. The table below presents the practical sound absorption coefficients in accordance with ISO 11654. The NRC rating is determined as the arithmetic average of the absorption coefficients measured by one-third octave bands centered on 250 Hz, 500 Hz, 1000 Hz and 2000 Hz and rounded to the nearest 0.05.

Frequency (Hz)	University of Auckland Test Report Number	125	250	500	1000	2000	4000	NRC
3D Tiles S-5.37 5.51"	T1316-4	0.15	0.65	0.60	0.70	0.75	0.70	0.65

PRODUCT SPECIFICATIONS

Product Name 3D Tiles S-5.37
 Composition 100% Polyester Fiber (PET)
 Tile Dimensions 22.6" x 22.6"
 Tile Tolerance (+0.02") (+0.02")
 Depth 5.51"
 Depth Tolerance (+0.0.2")
 Weight 5.51 oz/ft²

INSTALLATION

Install as per Autex recommendations. Install instructions are included in each pack or available on the website.

ACOUSTIC PERFORMANCE



3D Tiles S-5.37 are specifically designed to reduce and control reverberated noise (echo) in building interiors.

LIGHT REFLECTANCE VALUES BY COLOR


Civic	57	Avocado	11
Silver	23	Blush	10
Porcelain	22	Blazing Red	8
Fawn	20	Bark	5
Granny Smith	20	Stately	3
Stonewash	19	Charcoal	3
Brilliant Orange	15	Noir	1
Electric Blue	12		

MEASURED IN ACCORDANCE WITH BS 8493:2008+A1:2010

S-5.46 DESIGN

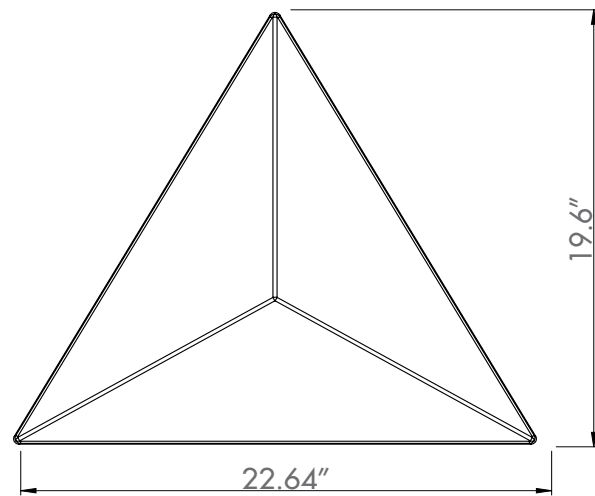

ABSORPTION COEFFICIENT ACCORDING TO ISO 354

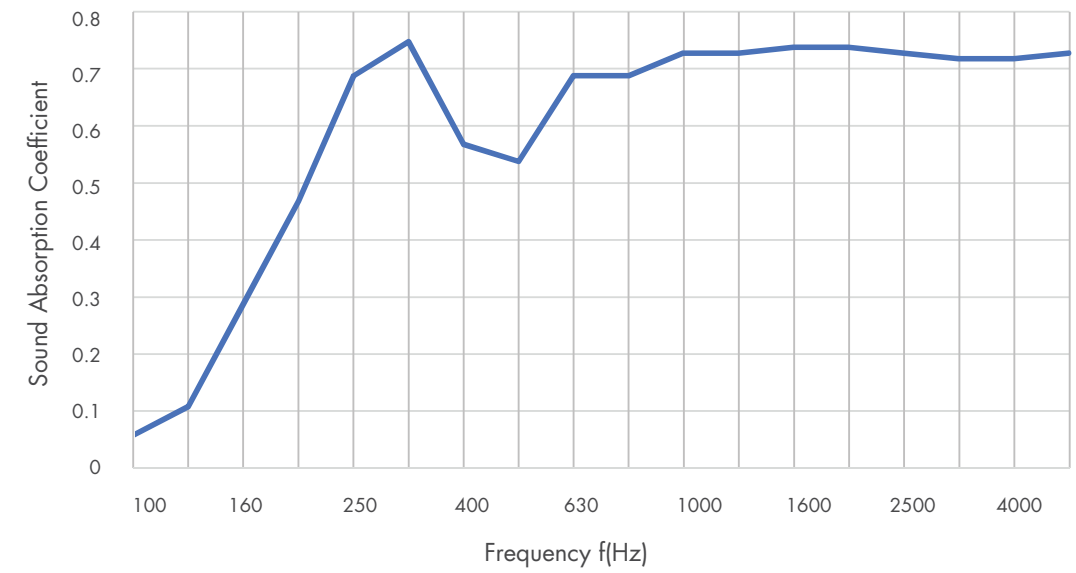

The graph above presents third octave sound absorption coefficients in accordance with ISO 354 measurement of sound absorption in a reverberation room. The table below presents the practical sound absorption coefficients in accordance with ISO 11654. The NRC rating is determined as the arithmetic average of the absorption coefficients measured by one-third octave bands centered on 250 Hz, 500 Hz, 1000 Hz and 2000 Hz and rounded to the nearest 0.05.

Frequency (Hz)	University of Auckland Test Report Number	125	250	500	1000	2000	4000	NRC
3D Tiles S-5.46 4.49"	T1316-4	0.15	0.65	0.60	0.70	0.75	0.70	0.65

PRODUCT SPECIFICATIONS

Product Name	3D Tiles S-5.46
Composition	100% Polyester Fiber (PET)
Tile Dimensions	19.6" x 22.6"
Tile Tolerance	(+0.02") (+0.02")
Depth	4.49"
Depth Tolerance	(+0.0.2")
Weight	5.51 oz/ft ²

INSTALLATION

Install as per Autex recommendations. Install instructions are included in each pack or available on the website.

ACOUSTIC PERFORMANCE




3D Tiles S-5.46 are specifically designed to reduce and control reverberated noise (echo) in building interiors.

LIGHT REFLECTANCE VALUES BY COLOR


Civic	57	Avocado	11
Silver	23	Blush	10
Porcelain	22	Blazing Red	8
Fawn	20	Bark	5
Granny Smith	20	Stately	3
Stonewash	19	Charcoal	3
Brilliant Orange	15	Noir	1
Electric Blue	12		

MEASURED IN ACCORDANCE WITH BS 8493:2008+A1:2010

S-5.50 DESIGN

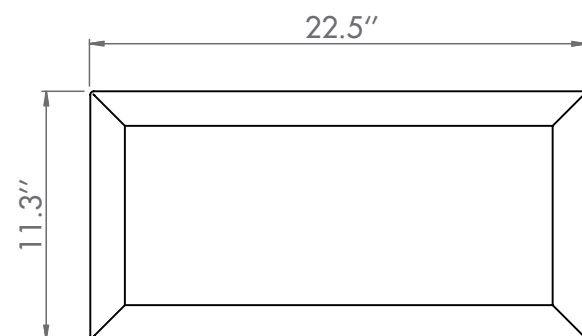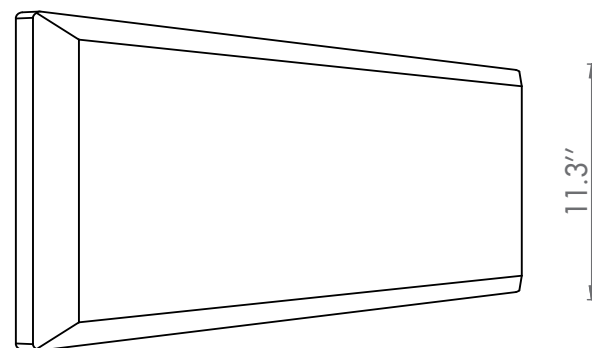

ABSORPTION COEFFICIENT ACCORDING TO ISO 354

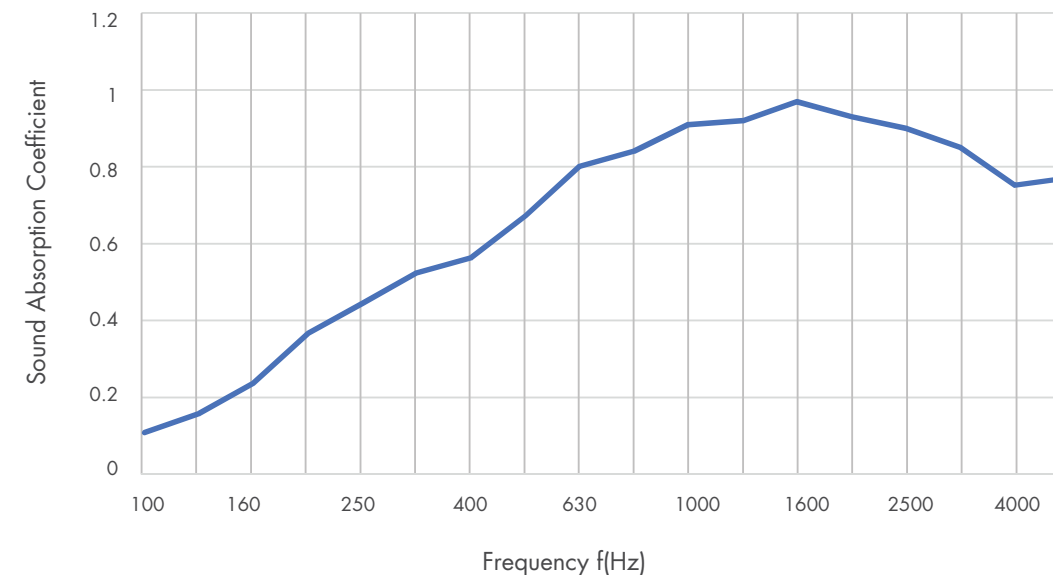

The graph above presents third octave sound absorption coefficients in accordance with ISO 354 measurement of sound absorption in a reverberation room. The table below presents the practical sound absorption coefficients in accordance with ISO 11654. The NRC rating is determined as the arithmetic average of the absorption coefficients measured by one-third octave bands centered on 250 Hz, 500 Hz, 1000 Hz and 2000 Hz and rounded to the nearest 0.05.

Frequency (Hz)	University of Auckland Test Report Number	125	250	500	1000	2000	4000	NRC
3D Tiles	T10123	0.15	0.45	0.65	0.90	0.90	0.80	0.75

PRODUCT SPECIFICATIONS

Product Name	3D Tiles S-5.50
Composition	100% Polyester Fiber (PET)
Tile Dimensions	11.3" x 22.5"
Tile Tolerance	(+0.02") (+0.02")
Depth	3.15"
Depth Tolerance	(+0.0.2")
Weight	5.51 oz/ft ²

INSTALLATION

Install as per Autex recommendations. Install instructions are included in each pack or available on the website.

ACOUSTIC PERFORMANCE




3D Tiles S-5.50 are specifically designed to reduce and control reverberated noise (echo) in building interiors.

LIGHT REFLECTANCE VALUES BY COLOR


Civic	57	Avocado	11
Silver	23	Blush	10
Porcelain	22	Blazing Red	8
Fawn	20	Bark	5
Granny Smith	20	Stately	3
Stonewash	19	Charcoal	3
Brilliant Orange	15	Noir	1
Electric Blue	12		

MEASURED IN ACCORDANCE WITH BS 8493:2008+A1:2010

S-5.53 DESIGN

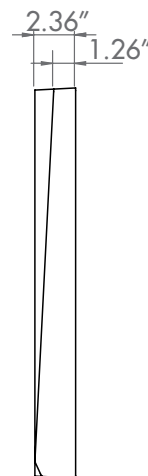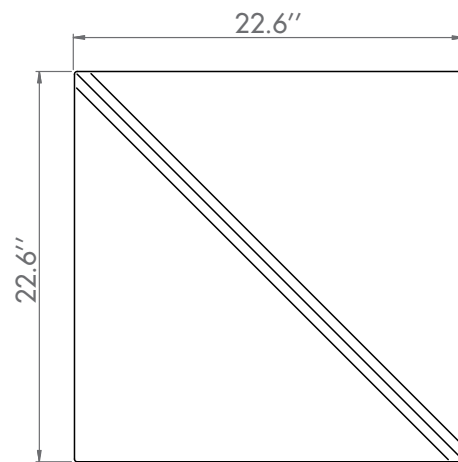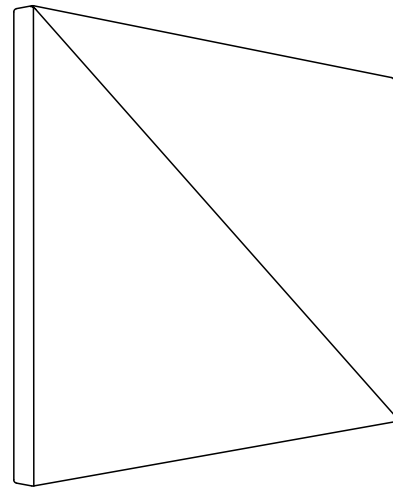

ABSORPTION COEFFICIENT ACCORDING TO ISO 354

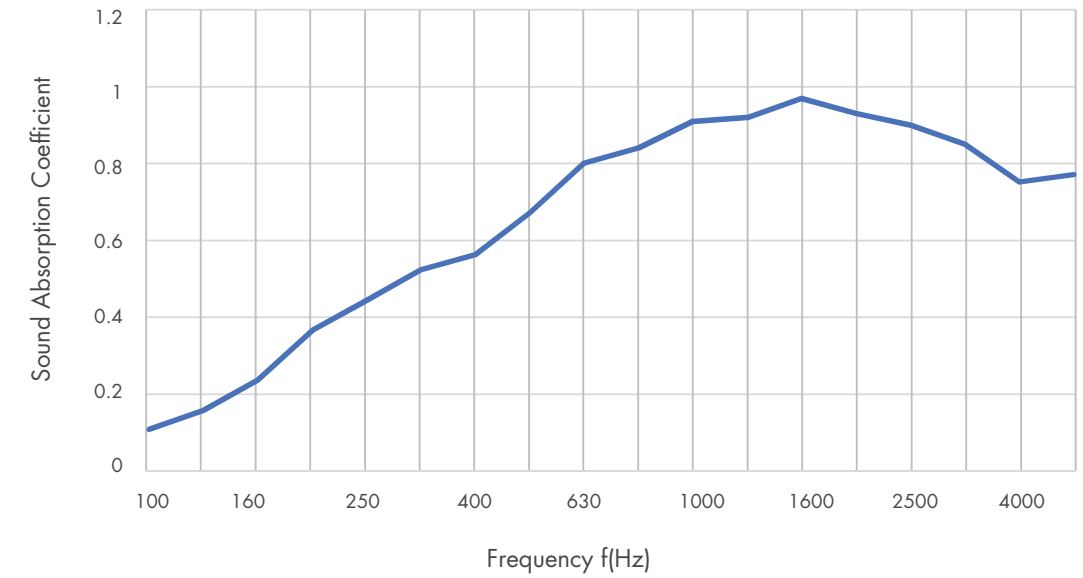

The graph above presents third octave sound absorption coefficients in accordance with ISO 354 measurement of sound absorption in a reverberation room. The table below presents the practical sound absorption coefficients in accordance with ISO 11654. The NRC rating is determined as the arithmetic average of the absorption coefficients measured by one-third octave bands centered on 250 Hz, 500 Hz, 1000 Hz and 2000 Hz and rounded to the nearest 0.05.

Frequency (Hz)	University of Auckland Test Report Number	125	250	500	1000	2000	4000	NRC
3D Tiles	T10123	0.15	0.45	0.65	0.90	0.90	0.80	0.75

PRODUCT SPECIFICATIONS

Product Name	3D Tiles S-5.53
Composition	100% Polyester Fiber (PET)
Tile Dimensions	22.6" x 22.6"
Tile Tolerance	(+0.02") (+0.02")
Depth	2.36"
Depth Tolerance	(+0.0.2")
Weight	5.51 oz/ft ²

INSTALLATION

Install as per Autex recommendations. Install instructions are included in each pack or available on the website.

ACOUSTIC PERFORMANCE

3D Tiles S-5.53 are specifically designed to reduce and control reverberated noise (echo) in building interiors.

LIGHT REFLECTANCE VALUES BY COLOR

Civic	57	Avocado	11
Silver	23	Blush	10
Porcelain	22	Blazing Red	8
Fawn	20	Bark	5
Granny Smith	20	Stately	3
Stonewash	19	Charcoal	3
Brilliant Orange	15	Noir	1
Electric Blue	12		

MEASURED IN ACCORDANCE WITH BS 8493:2008+A1:2010

FIRE RATINGS

3D Tiles is a value-added product made from Autex Workstation as the base material. Workstation has been evaluated using the following test methods:

ASTM E84 - 14

Class A, FS:0 - SD:10
Report RJ3297-10 dated 13th June 2014

VOC EMISSIONS

Autex polyester has been tested for chemical emissions in accordance with ASTM D5116 and is considered as a low VOC product. VOC concentration: 0.009 mg/m³ (7 days).

WATER VAPOR SORPTION

ASTM C1104 / C1104M-13a
Test conditions: 49°C, 95%RH
Water vapor absorbed and adsorped after 4 days:
0.4% by weight.

MICROBIAL RESISTANCE

ASTM G21-15
Growth Rating: 0 (No growth)
3D Tiles do not promote the growth of molds and mildew.

COLOR FASTNESS TO LIGHT

3D Tiles are suitable for indoor use only. Lightfastness is dependent on use and exposure. 3D Tiles have been evaluated to the following standard:

ISO 105-B02:2014

Rating: 6 (Highest = 7)

COLOR FASTNESS TO RUBBING

ISO 105-X12:2016
Dry Rating: 4-5 (Highest = 5)
Wet Rating: 4-5 (Highest = 5)

PATTERN REPEAT

Non-woven. No pattern repeat, but the product has a directional grain. Product may vary from samples and batch to batch due to fiber blending and lay-up, which is an inherent feature of this product.

FABRIC CARE

Blot spills from fabric quickly. Wipe with a damp cloth. Avoid rubbing and using excessive amounts of water as this will affect the finish. Use carpet or upholstery shampoo as directed. Blot with a clean, dry cloth after each application of the solution.

Custom printed Workstation requires the services of a specialist cleaning company. Refer to the 3D Tiles Care and Maintenance Guide for more information.

ENVIRONMENTAL

Autex is committed to best practice through our ISO 9001 and ISO 14001 certified Quality and Environmental Management Systems.

Autex 3D Tiles contain a minimum of 55% previously recycled polyester fiber (from PET bottle-flake). Off-cuts and manufacturing waste are re-used or recycled wherever possible.

Autex 3D Tiles are manufactured from 100% polyester fibers and do not contain formaldehyde binders. Autex polyester fibers support safer indoor air quality and will not become a potential airborne pollutant.

SERVICE

For further information about 3D Tiles, Workstation or any other Autex product, please contact your Autex account manager or visit our website.

3D TILES


DESIGN: S-5.46
COLOR: ELECTRIC BLUE,
GRANNY SMITH, MYST
AND SILVER





3D TILES
 DESIGN: CUSTOM
 COLOR: CHARCOAL,
 SILVER AND STATELY

3D TILES COLOR OPTIONS

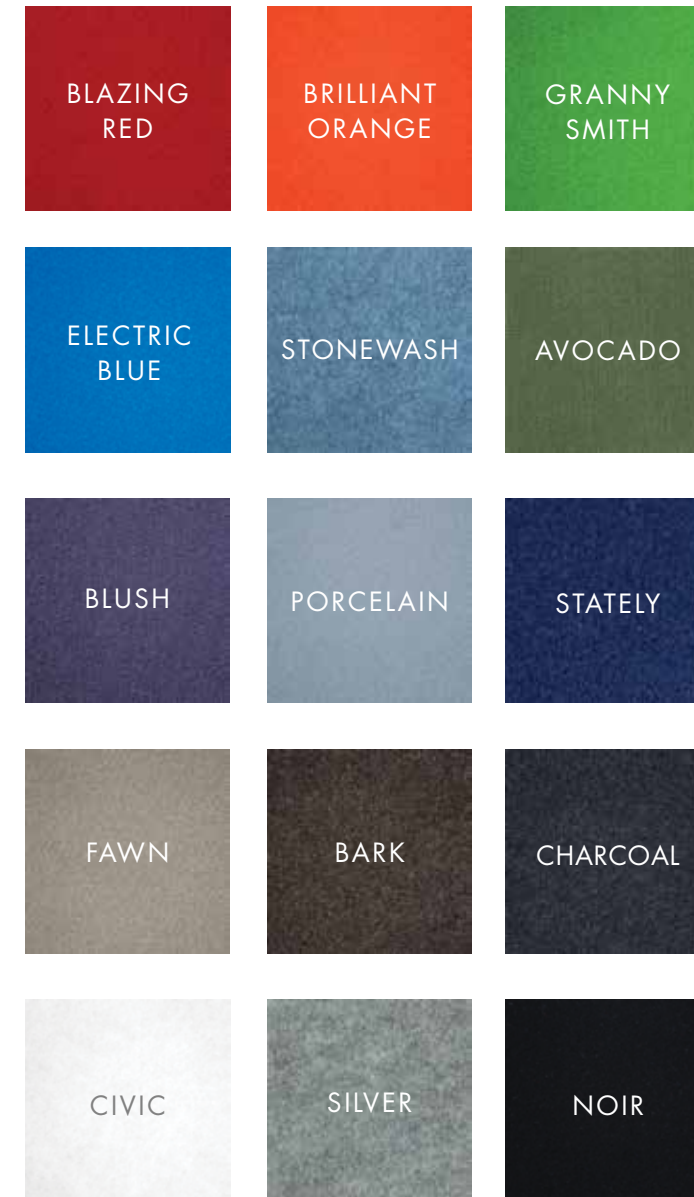

MOQ's apply to some colors, custom colour available on request.
 To find out more, or to order a sample, please contact your account
 manager or visit our website.



CARING FOR THE ENVIRONMENT

3D Tiles are manufactured using 100% polyester fiber and contain a minimum of 55% previously recycled fiber (from PET plastics). Our products are designed to be recycled at the end of their life too.

We use Life Cycle Analysis (LCA) to understand the environmental impacts of our products and set targets to reduce these. All our products have been verified as low VOC and are free from chemical binders, making them great for indoor environmental quality (IEQ). We have continual improvement programmes in which we implement a range of initiatives to mitigate the environmental 'hotspots' that we have identified. Our products are GreenRate Level A, LCARate Gold and PHD level platinum certified.

3D Tiles are made from Workstation which is DeclareSM certified to be Red List Free and can be used in Living Building Challenge projects. Autex has a high functioning Environmental Management System (ISO 14001) to enhance our environmental performance and contribute to sustainable development.



Declare.



Autex Industries Ltd

702-718 Rosebank Rd,
Private Bag 19988,
Avondale 1746, Auckland,
New Zealand

Freephone **0800 428 839**
Phone **+64 9 828 9179**
Fax **+64 9 828 5810**

www.autex.co.nz

Autex Australia Pty Ltd

166 Bamfield Road,
PO Box 5099,
West Heidelberg, Melbourne,
VIC 3081, Australia

Freephone **1800 678 160**
Phone **+61 3 9457 6700**
Fax **+61 3 9457 1020**

www.autex.com.au

Autex Acoustics Ltd

Unit J4, Lowfields Way,
Lowfields Business Park,
Elland, West Yorkshire,
Hx5 9Da,
United Kingdom

Phone **+44 0 1422 418899**

www.autexacoustics.co.uk

Autex Acoustics LLC

19350 Van Ness Avenue
Torrance, CA 90501
United States of America
Phone **+1 310 490 1591**

www.autexacoustics.com