

INTERIOR ACOUSTICS SORDINO



**SORDINO™**  
COLOR: ELECTRIC BLUE  
AND BLAZING RED



## SORDINO™

Sordino™ is an acoustic fabric made in solid colors that is designed to be used in the same way wallpaper is. But unlike wallpaper it can be used as a pinnable surface and offers a sleek, flat finish unlike Composition, which has more of a work horse finish, it offers a higher sense of luxury, but is essentially personal choice.

Beyond all that, it creates focused spaces by reducing and managing the echo in the room resulting in a more productive environment.

And because not all spaces are the same we've given you creative freedom. We can cut to any shape and add any design, creating something as unique as each one of us. It's highly durable and takes everything you can throw at it giving you the assurance of longevity.

# SORDINO™

## APPLICATIONS

- Decorative yet functional wall coverings for classrooms, retail stores or office interiors
- Fixed acoustic wall covering for the purpose of improving the environment by reducing reverberation and background chatter

## SPECIFICATION:

(Wall) treatment shall be Autex Sordino™ from thermally bonded high density polyester containing not less than 60% recycled material as manufactured by Autex [www.autexindustries.com](http://www.autexindustries.com)

Roll 0.4" - 0.5"(nom. depth), color (L), sound absorption: Class D, NRC 0.40 Fire rating ISO 9705: Classification: Group 1-S, AS ISO 9705 – 2003: Classification: Group 1, EN13501-1:2007+A1:2009: B-s1, d0.

Install as per Autex recommendations. If Autex Sordino® is to be specified for use other than as a wallcovering, please seek guidance from your Autex Account Manager.







### ABSORPTION COEFFICIENT ACCORDING TO ISO 354

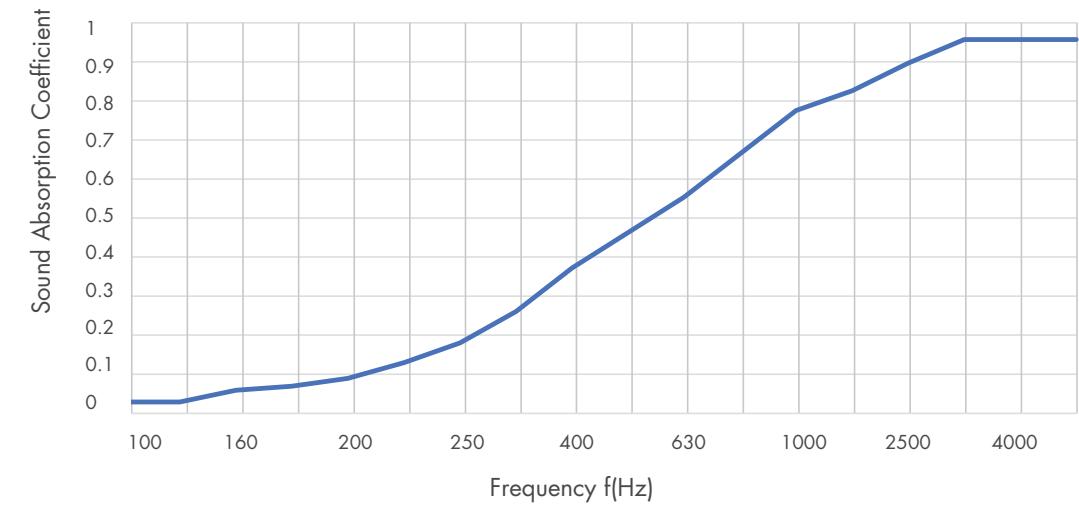


Table presents the practical sound absorption coefficients as according to ISO 11654. Graph presents third octave sound absorption coefficients (According to ISO 354 Measurement of sound absorption in a reverberation room.) The NRC rating is determined as the arithmetic average of the absorption coefficients measured by one-third octave bands centred on 250 Hz, 500 Hz, 1000 Hz and 2000 Hz, and rounded to the nearest 0.05.

Frequency (Hz)	University of Auckland Test Report Number	125	250	500	1000	2000	4000	NRC
<b>Sordino™ 0.4" - 0.5"</b>	T0814-2b	0.02	0.08	0.25	0.54	0.81	0.94	<b>0.40</b>

### PRODUCT SPECIFICATIONS

Product Name Sordino™  
 Composition 100% Polyester Fibre (PET)  
 Roll Dimensions 48" x 36'  
 Tolerance (+0.2") (+0.4")  
 Thickness 0.4" - 0.5"  
 Weight 5.67 oz/ft<sup>2</sup>

### INSTALLATION

Install as per Autex recommendations. Install instructions are included in each pack or available on the website. If Sordino™ is to be specified for use other than as a wallcovering, please seek guidance from your Autex account manager.

### LIGHT REFLECTANCE VALUES BY COLOR

Civic	57	Avocado	11
Citrus	49	Blush	10
Myst	42	Sage	9
Sanz	36	Emerald	8
Wasabi	33	Sapphire	8
Lime	29	Atlantis	8
Azure	24	Blazing Red	8
Silver	23	Raspberry	8
Jade	22	Vintage	6
Porcelain	22	Chilli Red	5
Fawn	20	Cinder	5
Clay	20	Bark	5
Granny Smith	20	Octane	5
Stonewash	19	Phantom	4
Simba	18	Theatre	3
Brilliant Orange	15	Stately	3
Spearmint	13	Charcoal	3
Calypso	13	Lightsout	3
Electric Blue	12	Ink	3
Koala	12	Noir	1

LRVs were measured in accordance with BS 8493:2008+A1:2010

### FIRE RATING

Sordino™ has been evaluated using the following test methods:

#### ASTM E84 - 14

Class A, FS:5 - SD:25

Report RJ3297-9R1 dated 17th March, 2015

### VOC EMISSIONS

Autex polyester has been tested for chemical emissions in accordance with ASTM D5116 and is considered as a low VOC product.

VOC concentration: 0.009 mg/m<sup>3</sup> (7 days)

### WATER VAPOR SORPTION

ASTM C1104 / C1104M-13a

Test conditions: 49°C, 95%RH

Water vapour absorbed and adsorbed after 4 days: 0.4% by weight.

### IMPACT RESISTANCE

ISO 7892:1988

#### Hard Body Impact

There is no surface damage or penetration to Sordino when subjected to hard body impacts. When adhered to 10mm plasterboard, the system can resist a 9-joule impact. This is equivalent to the impact of a 0.5kg object dropped from a 2m height. A small indentation might be observed when subjected to an impact equivalent to the impact of a 0.5kg object dropped from a 0.5-m height.

#### Soft Body Impact

There is no surface damage or penetration to Sordino when subjected to soft body impacts. When adhered to 10mm plasterboard, the system can resist a 70-joule impact. This is equivalent to the impact of a 50-kg object dropped from a 150mm height.

### COLOR FASTNESS TO LIGHT

Sordino is suitable for indoor use only. Light fastness is dependent on use and exposure. Sordino has been evaluated to the following standard:

ISO 105-B02:2014

Rating: 6 (Highest = 7)

### COLOR FASTNESS TO RUBBING

ISO 105-X12:2016

Dry Rating: 4-5 (Highest = 5)

Wet Rating: 4-5 (Highest = 5)

### PATTERN REPEAT

Non-woven. No pattern repeat but product has directional grain. Product may vary from samples and batch to batch due to fibre blending and lay-up which is an inherent feature of this product.

### ACOUSTIC PERFORMANCE

Sordino is specifically designed to reduce and control reverberated noise (echo) in building interiors.

### MICROBIAL RESISTANCE

ASTM G21-15

Growth Rating: 0 (No growth)

Sordino does not promote the growth of moulds and mildew.

### FABRIC CARE

Blot spills from fabric quickly. Wipe with a damp cloth. Avoid rubbing and excessive amounts of water as this will affect the finish. Use carpet or upholstery shampoo as directed. Blot with a clean dry cloth after each application of solution.

Custom printed Sordino requires the services of a specialist cleaning company. Refer to the Sordino Cleaning and Maintenance Guide for more information.

### ENVIRONMENTAL


Autex is committed to best practice through our ISO 9001 and ISO 14001 certified Quality and Environmental Management Systems.

Autex Sordino contains a minimum of 60% previously recycled polyester fibre (from PET bottle-flake). Off-cuts and manufacturing waste are re-used or recycled wherever possible.

Autex Sordino is manufactured from 100% polyester fibres and does not contain formaldehyde binders. Autex polyester fibres support safer indoor air quality and will not become a potential airborne pollutant.

### SERVICE

For further information about Sordino or any other Autex product, please contact your Autex account manager or visit our website.

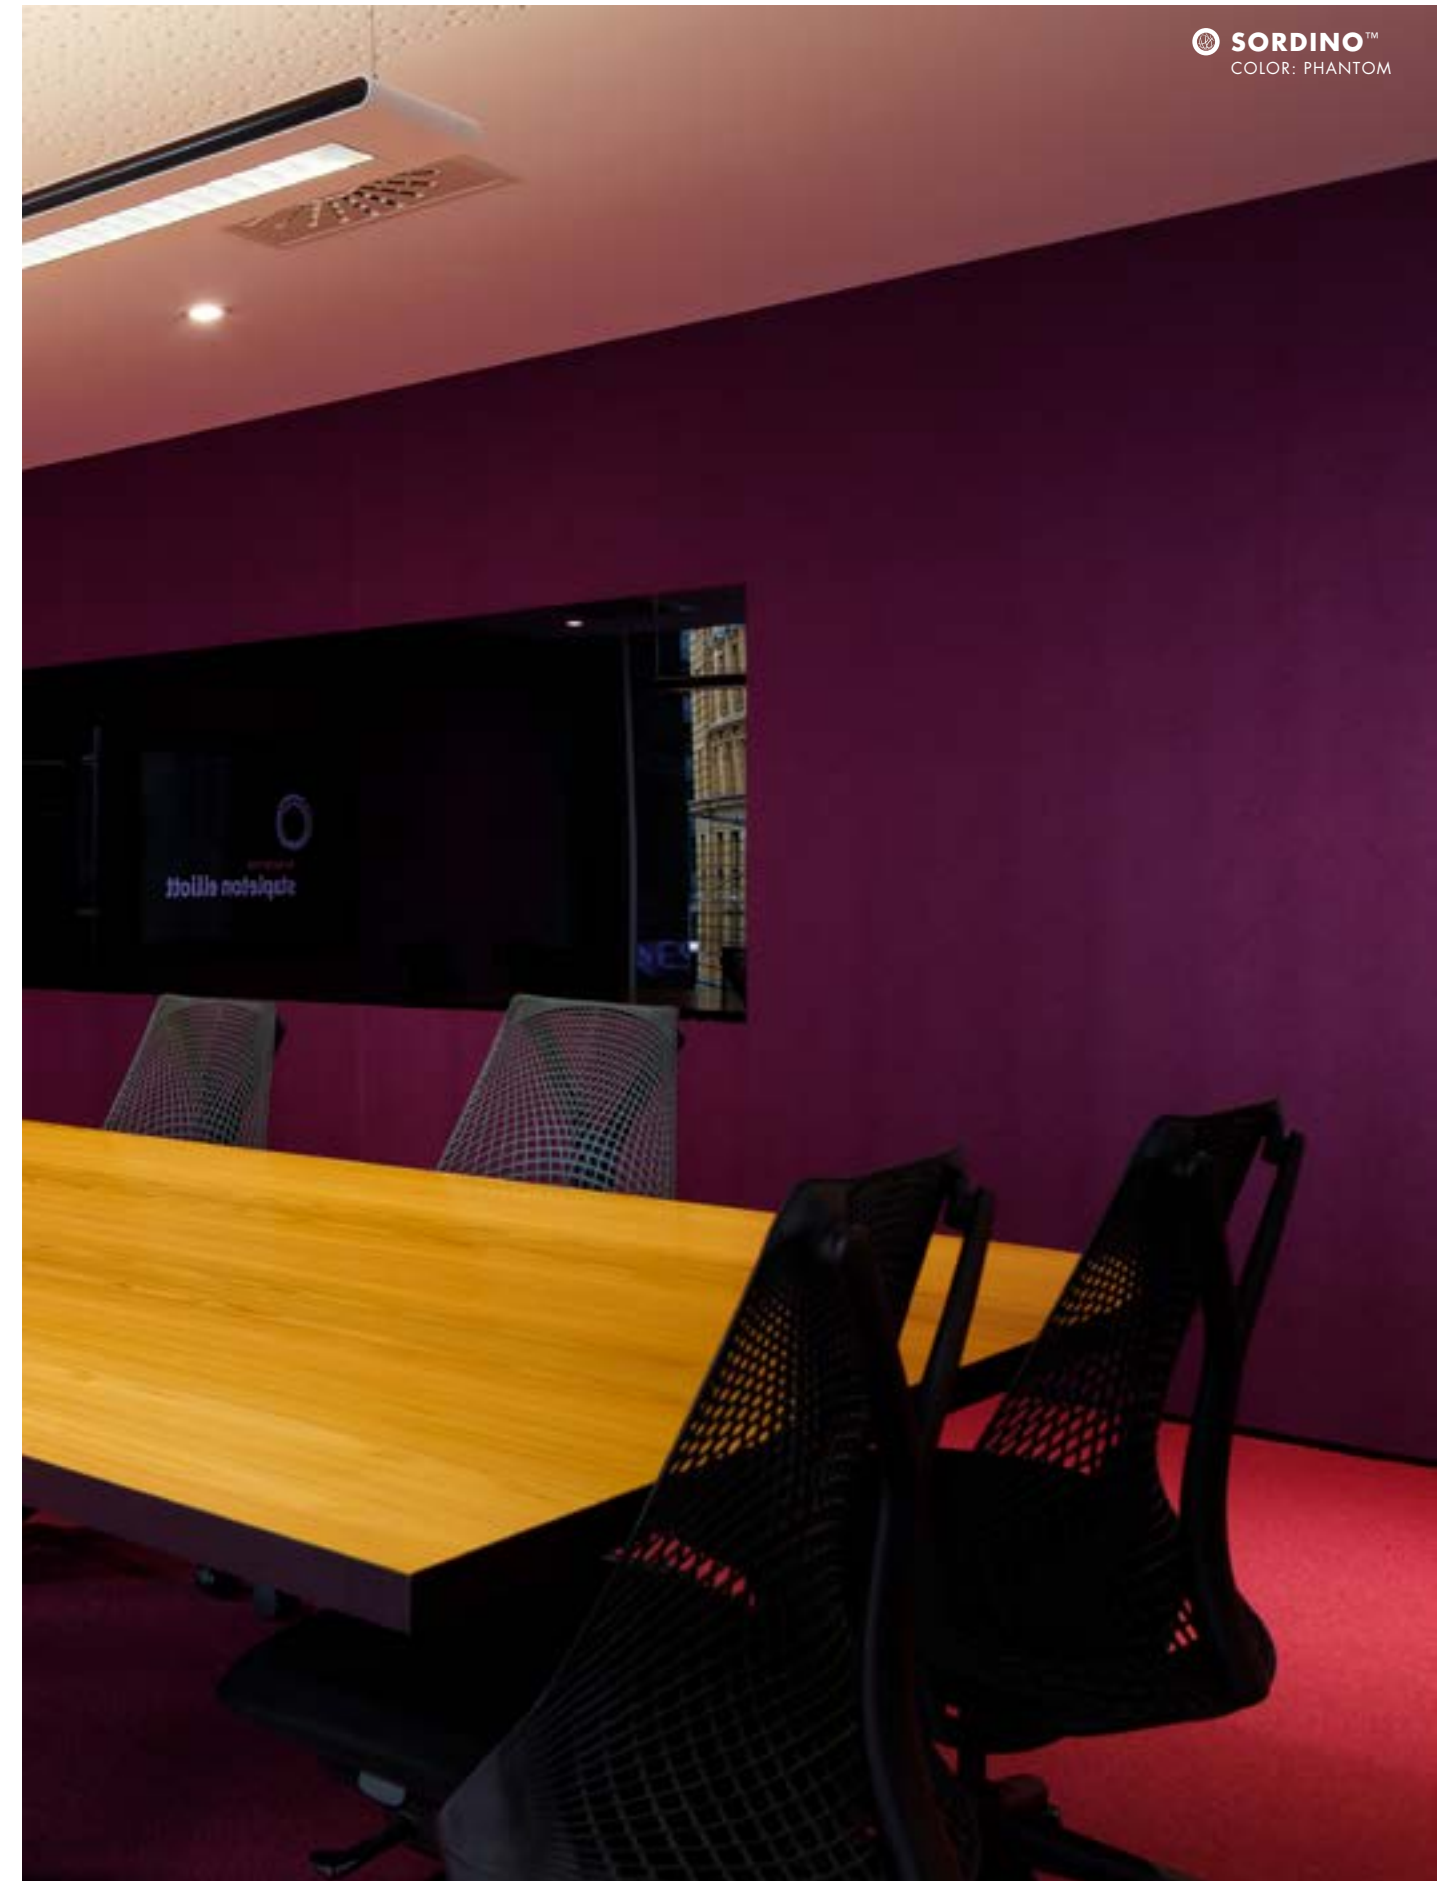

## SORDINO™ COLOR OPTIONS



To order a color sample, please contact your Autex account manager  
or visit [www.autexindustries.com](http://www.autexindustries.com)

## SORDINO™ COLOR OPTIONS



To order a color sample, please contact your Autex account manager  
or visit [www.autexindustries.com](http://www.autexindustries.com)



**SORDINO™**  
COLOR: BLAZING RED







# CARING FOR THE ENVIRONMENT

Sordino™ is manufactured using 100% polyester fibre and contains a minimum of 60% previously recycled fibre (from PET plastics). Our products are designed to be recycled at the end of their life too. We use Life Cycle Analysis (LCA) to understand the environmental impacts of our products and set targets to reduce these. All our products have been verified as low VOC and are free from chemical binders making them great for indoor environmental quality (IEQ).

We have continual improvement programmes in which we implement a range of initiatives to mitigate the environmental 'hotspots' that we have identified. Our products are GreenRate Level A, LCARate Gold and PHD level platinum certified.

Sordino™ is Declare certified to be Red List free and can be used in Living Building Challenge projects. Autex has a high functioning Environmental Management System (ISO 14001) to enhance our environmental performance and contribute to sustainable development."



**Declare.**





**Autex Industries Ltd**  
702-718 Rosebank Rd,  
Private Bag 19988,  
Avondale 1746, Auckland,  
New Zealand  
Freephone **0800 428 839**  
Phone **+64 9 828 9179**  
Fax **+64 9 828 5810**  
**www.autex.co.nz**

**Autex Australia Pty Ltd**  
166 Bamfield Road,  
PO Box 5099,  
West Heidelberg, Melbourne,  
VIC 3081, Australia  
Freephone **1800 678 160**  
Phone **+61 3 9457 6700**  
Fax **+61 3 9457 1020**  
**www.autex.com.au**

**Autex Acoustics Ltd**  
Unit J4, Lowfields Way,  
Lowfields Business Park,  
Elland, West Yorkshire,  
Hx5 9Da,  
United Kingdom  
Phone **+44 (0) 1422 418899**  
**www.autexacoustics.co.uk**

**Autex Acoustics LLC**  
19350 Van Ness Avenue  
Torrance, CA 90501  
United States of America  
Phone **+1(310)490-1591**  
**www.autexacoustics.com**

**Autex Acoustics  
Asia Sdn. Bhd**  
03-05, Indah Walk 3,  
Jalan Indah 15,  
Taman Bukit Indah,  
79100, Iskandar Puteri,  
Johor  
**www.autexacoustics.asia**